


BASE CABINETS B-1, SINK BASE SB-1
EPOXY RESIN TOP AT 36" AFF
SINK S-1 - SEE PLUMBING FIXTURE SCHEDULE P-601
SEE 2/A-521 FOR SINK SECTION



1 NORTH WALL - SINK WALL
A-501

ACCESSIBLE WORK SURFACE AT 34" AFF
OPEN KNEE SPACE BELOW - NO BASE CABINET
CASEWORK SCHEDULE TYPE AW-1

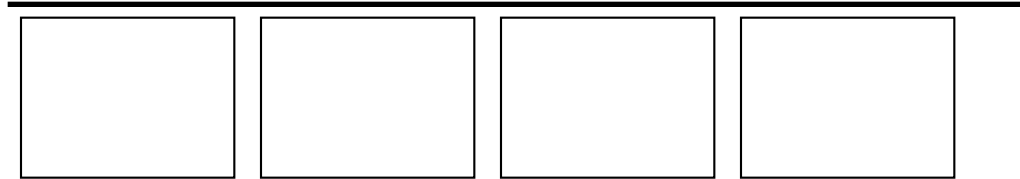


2 WEST WALL - ACCESSIBLE STUDENT STATION
A-501

EPOXY TOP AT 36" AFF ON CONCEALED STEEL BRACKETS
BRACKETS AT 48" O.C. MAX - SEE 5/A-521
NO BASE CABINETS - OPEN BELOW



3 EAST WALL - WALL-HUNG COUNTER
A-501

FUME HOOD FH-1 (BY 11 53 13) ON ACID STORAGE BASE AB-1
AB-1 VENTED TO HOOD EXHAUST
TOP AT 36" AFF

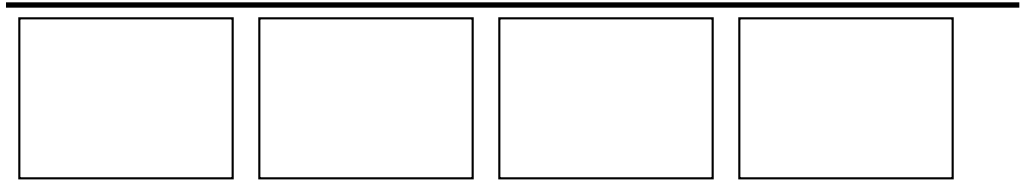

4 SOUTH WALL - FUME HOOD BASE
A-501


SAMPLE SCHOOL RENOVATION

INTERIOR ELEVATIONS - SCIENCE LAB 104

SHEET NUMBER

A-501


UNDERMOUNT SINK S-1 IN EPOXY RESIN TOP
CUTOUT PER SINK MANUFACTURER TEMPLATE FOR SCHEDULED MODEL

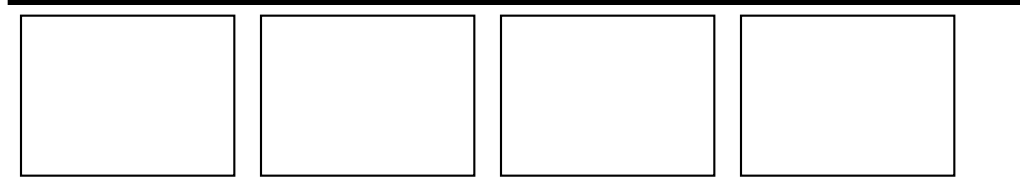

2
A-521

SINK SECTION

STEEL BRACKET FURNISHED BY CASEWORK MANUFACTURER
INSTALLED BY FRAMING CONTRACTOR BEFORE GYPSUM BOARD
16 GA STEEL BACKING PLATE BLK-2 BETWEEN STUDS
BRACKET CAPACITY 300 LB EACH

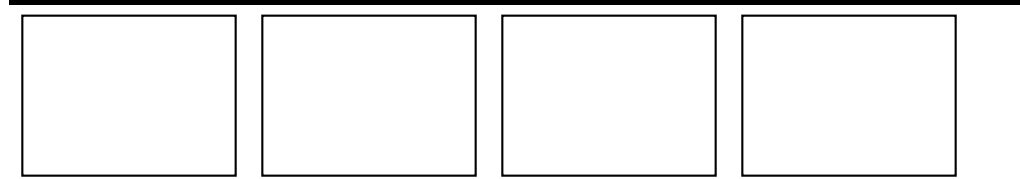

5
A-521

CONCEALED IN-WALL COUNTER BRACKET


SAMPLE SCHOOL RENOVATION

CASEWORK DETAILS

SHEET NUMBER

A-521

S-1 LAB SINK, EPOXY RESIN, UNDERMOUNT - ACME LS-2416 (24 x 16 BOWL)
S-2 HAND SINK, STAINLESS, DROP-IN - ACME HS-1512
EW-1 EYEWASH, PEDESTAL - BY 22 45 00

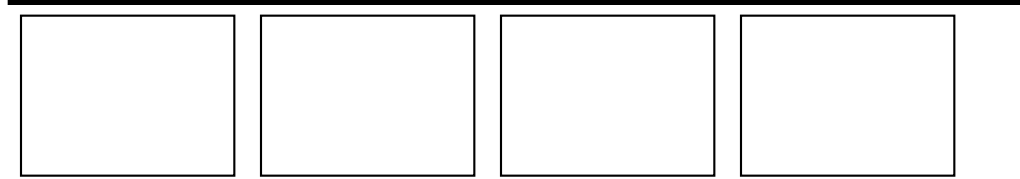

1
P-601 PLUMBING FIXTURE SCHEDULE

SAMPLE SCHOOL RENOVATION

PLUMBING SCHEDULES

SHEET NUMBER

P-601